

Ventless Hood Model FSH-5

- The compact and simple design of the ventless hood eliminates the need for expensive roof modifications and the hassle of dealing with multiple vendors supplying separate hood and electrical systems.
- Our one-of-a-kind stainless steel hood provides vapor removal requirements for a variety of food service applications and equipment.



Construction


18 guage stainless steel

Standard Features


VENTLESS HOOD SYSTEM

- The Ventless Hood consists of an Air Filtration System. The Air Filtration System operates in three steps:
- (1) Baffle Filters trap large grease particles;
- (2) Prefilters, not shown, allow for additional grease laden vapors to be removed from the air more efficiently.
- (3) Electronic Air Cleaners consist of an ionizer which charges particles of grease in the air allowing them to be collected by an electrostatic force;
- (4) Charcoal Filters further entrap any particles which may have escaped the Precipitator, and the charcoal filter helps eliminate odors.

Air Cleaner



1



Charcoal Filter


NSF.

Giles Foodservice Equipment A Division of Giles Enterprises, Inc. P.O. Box 210247 • 2750 Gunter Park Drive West • Montgomery, AL 36121-0247 USA 334.272.1457 • Fax 334.272.3561 • Phone Toll Free 1.800.554.4537 Email: info@gilesent.com

Printed in U.S.A. 5/99 Form 60650

Job ___ _ Item No. _

Ventless Hood **Model FSH-5**

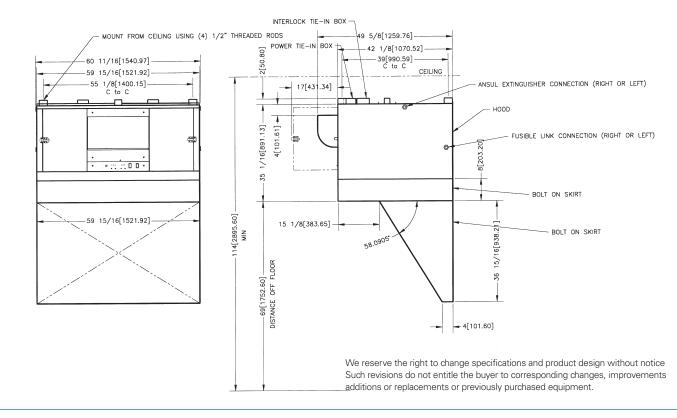

DIMENSIONS:

Width: 60 11/16" 154.14 cm Depth: 49 5/8" Height: 75" 190.50 cm

126.05 cm

ELECTRICAL SPECIFICATIONS:

208/240 V 15 AMPS 60 HZ 1 phase only.

WEIGHT (CRATED):

Shipping Weight: 644 lbs (292.37 kg) Shipping Size: 55" x 81" x 50" = 128.91 cu ft (139.7 x 205.74 x 127 = 3.65 cu meters)

LISTINGS:

UL Classified, NSF listed, UL Canada, SBCCI #94161 BOCA #94-34 ICBO #5148 L.A. CTY RR 8110

CFM: 840 - 1290 Approx. Decibel Level 73

AIA#

Bidding Specifications

- 1. Specify as Model FSH-5.
- 2. Specify voltage (208/240).
- 3. Specify extra Electronic Air Cleaner (PN 20520) & (PN 20521) for back up.*
- 4. Specify extra charcoal filters (PN 32056) for replacement, requires two.*

- 5. Specify extra prefilters (PN 46762), for replacement, requires two.*
- 6. Specify shipping method.

7. For export consult factory.

*Additional charges



P.O. Box 210247 • 2750 Gunter Park Drive West • Montgomery, AL 36121-0247 USA 334.272.1457 • Fax 334.272.3561 • Phone Toll Free 1.800.554.4537 Email: info@gilesent.com